



## A POWER SUPPLY FOR EVERY APPLICATION

The range of Vista external weather proof Power Supply Units (PSUs) has been designed to provide installers with a complete range of options to cover any likely requirement.


Very competitive priced, the high-quality Vista PSUs cover a broad range of voltage and power consumptions. The benefit to installers is that their flexibility of power output choice allows installers to stock only a small number of PSU's, to cover all their CCTV project needs.

Featuring standard connectivity for common installation requirements, the PSUs are housed in a robust IP66 rated ABS plastic casing, feature easy to change fuses, and 2 x 22mm fitted glands for the safe routing of Power IN and OUT cables.


A larger 7 Amp PSU is available to allow the installation of just one PSU to provide the total power requirements for a Camera, Housing and a large IR LED illuminator.

Ideal for retail stores, schools, industrial sites, car parks and hospitals, there is a Vista PSU to suit any application.

To learn more about this product range please visit us at [vista-cctv.com](http://vista-cctv.com)

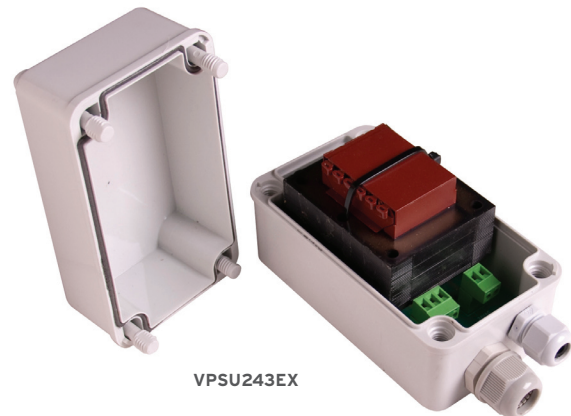

VPSU243EX

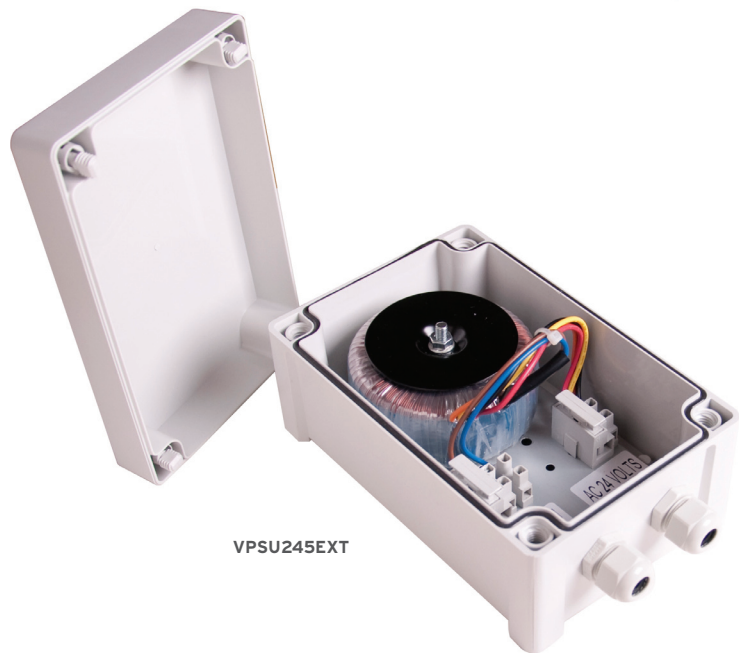

VPSU245EXT

### Key Features:

#### Robust enclosure

All PSUs are supplied in a IP66 rated ABS plastic casing

#### Cable glands

2 x 22mm glands for Power IN and OUT

#### Safe fuse removal

Easy and safe fuse removal thanks to intelligent design

#### Full PSU range

A range of 12Vdc and 24Vac supplies with varying power outputs are available

## THE PROFESSIONAL CHOICE

## MODELS IN THIS RANGE:

### 12V DC MODEL

VPSU122EXT 12Vdc 2Amp output External PSU

### 24V AC MODELS

VPSU243EXT 24Vac 3 Amp output External PSU

VPSU245EXT 24Vac 5 Amp output External PSU

VPSU247EXT 24Vac 7 Amp output External PSU

## TECHNICAL SPECIFICATION

	VPSU122EXT	VPSU243EXT	VPSU245EXT	VPSU247EXT
<b>Output Voltage</b>	12Vdc	24Vac	24Vac	24Vac
<b>Output Current</b>	2 Amps	3 Amps	5 Amps	7 Amps
<b>Input Voltage</b>	230 Vac	230 Vac	230 Vac	230 Vac
<b>Construction</b>	ABS	ABS	ABS	ABS
<b>IP Rating</b>	IP66	IP66	IP66	IP66
<b>Cable entry</b>	2 x Conduit gland	2 x Conduit gland	2 x Conduit gland	2 x Conduit gland
<b>Input connections</b>	Fused terminal block	Fused terminal block	Fused terminal block	Fused terminal block
<b>Output connections</b>	Fused terminal block	Fused terminal block	Fused terminal block	Fused terminal block
<b>Dimensions (mm)</b>	158(L)x89(H)x78(W)	158(L)x89(H)x78(W)	207(L)x122(H)x90(W)	207(L)x122(H)x90(W)
<b>Weight (Kg)</b>	1.44	1.44	1.71	1.71



No liability will be accepted by Vista for any errors or omissions in this information.

DS-ExternalPSU-version 1